

C-PURLINS

For roof and siding supports and light steel trusses.


PRODUCT INFO

MATERIAL	Hot-dip Zinc-Coated Steel
STEEL GRADE	Commercial Quality Structural grades available upon request
APPLICATIONS	For residential, commercial and industrial buildings, roof and siding supports, light steel trusses

* CUT TO SIZE AND OTHER THICKNESS AVAILABLE UPON REQUEST

PRODUCT STANDARD DIMENSION

SIZE	SPECS			STANDARD LENGTH	THICKNESS
	H	B	FW		
2X3	76.2	45	174	6m	0.80mm, 1.0mm, 1.20mm, 1.50mm, 1.80mm, 2.00m
2X4	101.6	48	203		
2X5	127	48	231		
2X6	155	45	244		
2X7	178	48	281		
2X8	203.2	45	305		
2X9	228	48	325		
2X10	259	45	355		
2X11	279	45	38		
2X12	302	48	406		

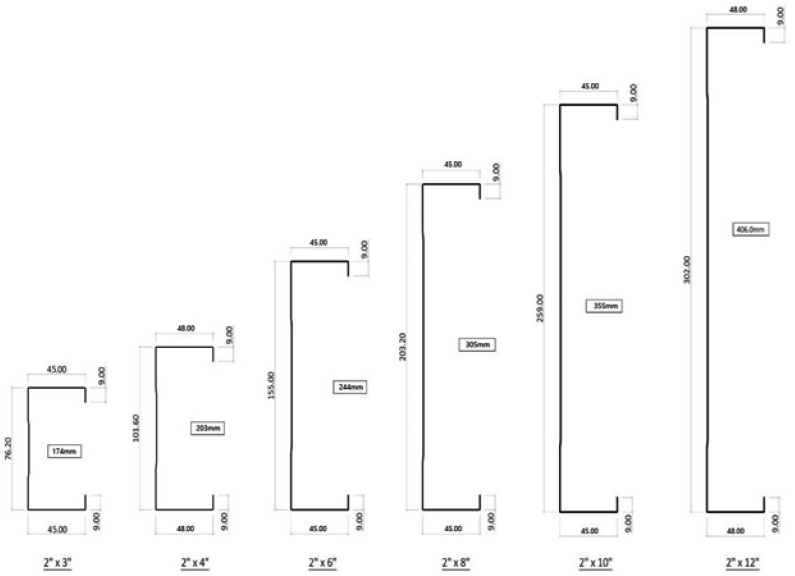

NOTE: - BASED ON MATERIALS OUTPUT.
- +/- DIMENSIONS.

HANDLING, STORAGE AND INSTALLATION GUIDELINES

